



Circulating water cooling



Industrial movement



Industrial Chassis



smart chip

# PORTABLE SPOT WELDING MACHINE

7" INCH TOUCH /LCD SCREEN SMART





PORTABLE SPOT  
WELDING MACHINE




# SMART AND TOUCH SCREEN CONTROL

## WELDING FEATURES 7" INCH TOUCH

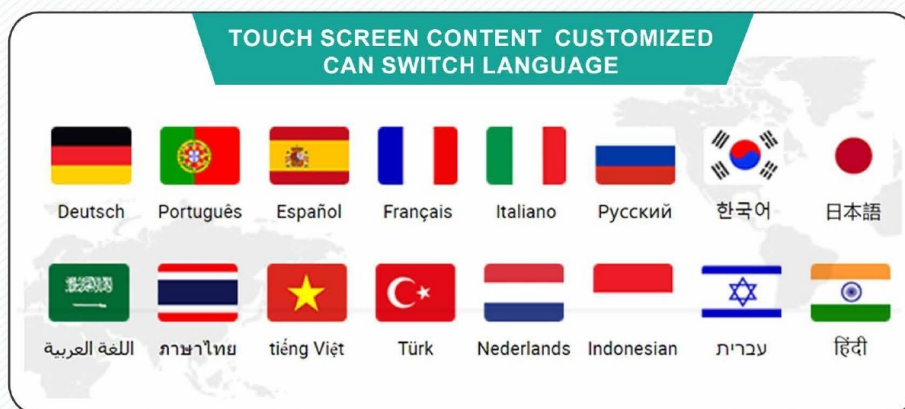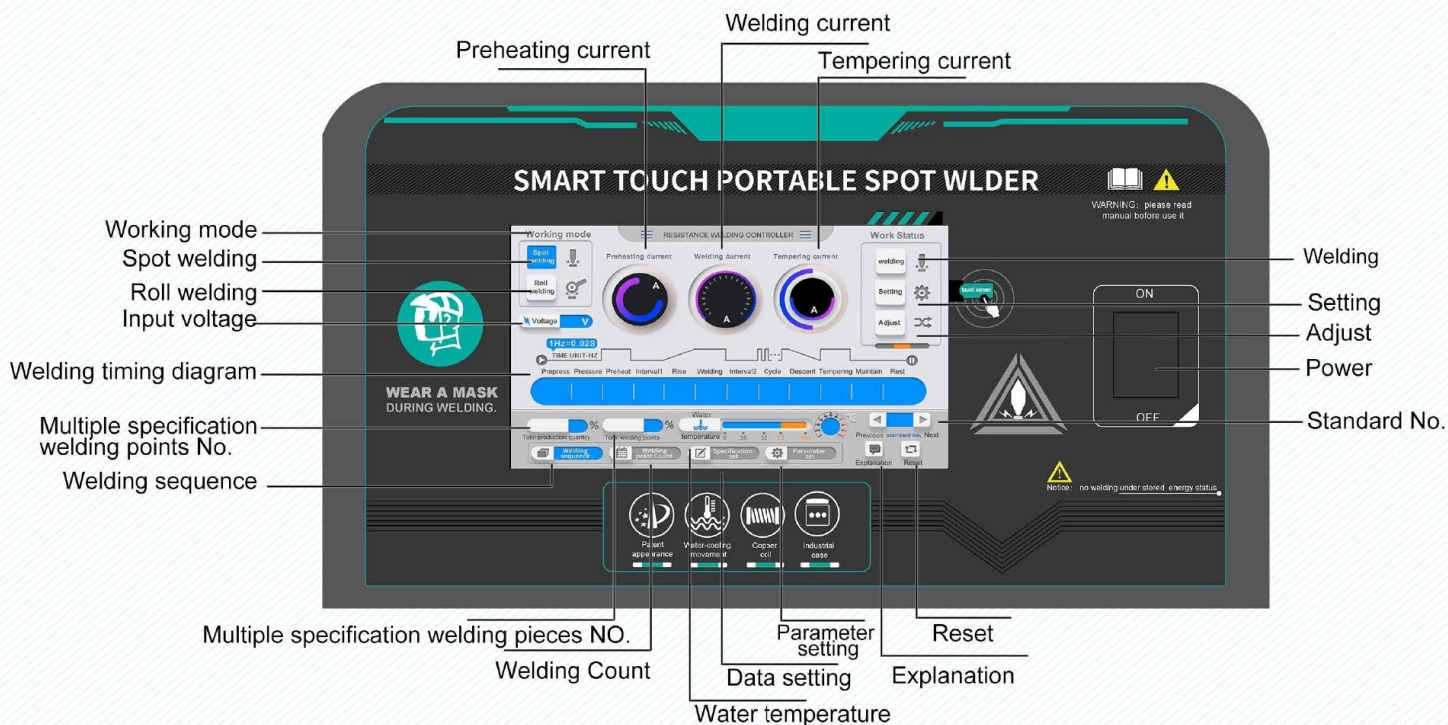

### Application of rolling welding torch

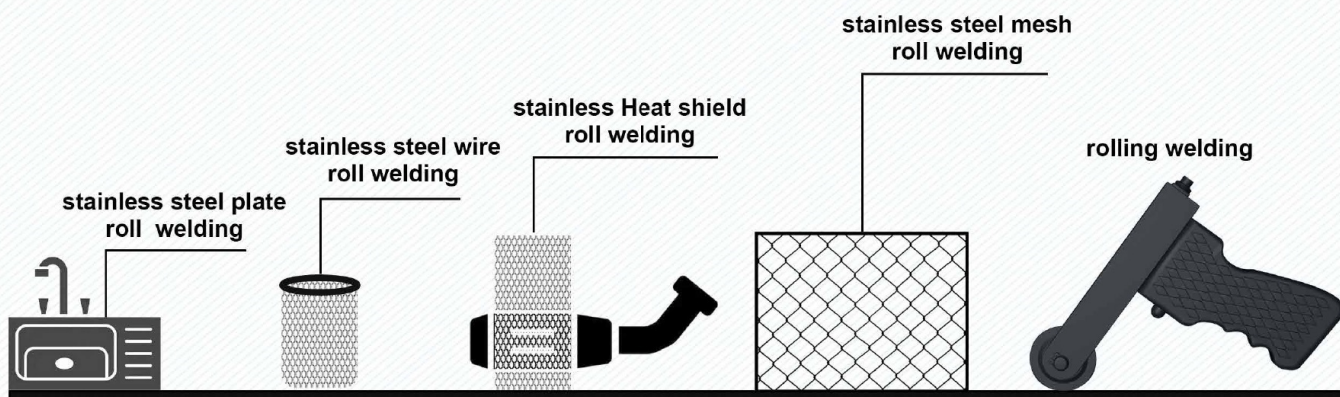




## PORTABLE SPOT WELDING MACHINE

### WELDING FEATURES 7" INCH TOUCH

|                                                                                   |                    |                   |
|-----------------------------------------------------------------------------------|--------------------|-------------------|
|  | Model:             | DNY-50S           |
|  | Input voltage:     | AC380V/50HZ       |
|  | Input capacity:    | 50KVA             |
|  | Welding thickness: | 0.1+0.1~4.0+4.0mm |
|  | Unload voltage:    | 4~15V             |
|  | Cold water flow:   | 180 L/h           |
|  | Machine weight:    | 97(KG)            |
|  | Overall size:      | 540×390×570(mm)   |



STANDARD  
ACCESSORY

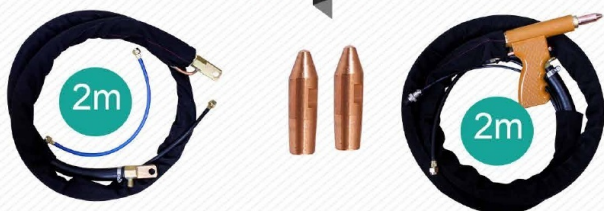

OPTIONAL  
ACCESSORY




## PORTABLE SPOT WELDING MACHINE

### WELDING FEATURES 7" INCH TOUCH

|                                                                                     |                    |                   |
|-------------------------------------------------------------------------------------|--------------------|-------------------|
|  | Model:             | DNY-80S           |
|  | Input voltage:     | AC380V/50HZ       |
|  | Input capacity:    | 80KVA             |
|  | Welding thickness: | 0.1+0.1~5.0+5.0mm |
|  | Unload voltage:    | 5~21V             |
|  | Cold water flow:   | 180 L/h           |
|  | Machine weight:    | 116(KG)           |
|  | Overall size:      | 540×390×570(mm)   |



STANDARD  
ACCESSORY

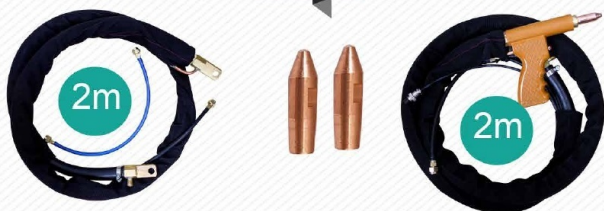

OPTIONAL  
ACCESSORY

